


ITEM NO		
PROJECT		
LOCATION		
DATE	QTY	

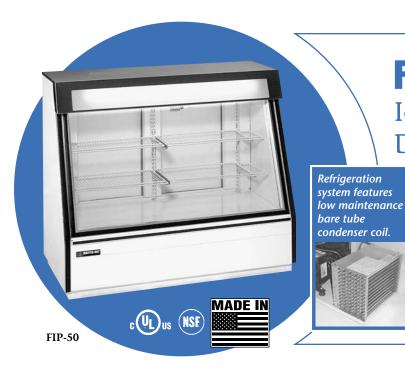

FIP-50 SERIES

Ice Cream And Novelty Display Merchandiser

> MODEL □ FIP-50

FEATURES

NEW STANDARD TEXTURED FINISH







Black also

available

CONSTRUCTION

- Standard electronic controller with these features:
 - Ability to monitor defrost functions from the front panel interface
 - Audible alarm
- Eliminates room thermostat, defrost termination/fan delay control, defrost timer and digital thermometer or other temperature indicator
- 24 gauge painted textured steel interior and exterior

- 60" x 19" top stainless steel serving
- Extra large, non-fogging front display window
- Four panes of tempered glass with a viewing area of 11.7 sq. ft.
- Removable backlit merchandising sign in stainless steel frame
- Anodized aluminum trim with black vinyl inlay
- Four adjustable heavy-duty, white epoxy-coated, welded wire shelves
- Protective front bumper
- Full length fluorescent lamp
- Automatic condensate evaporator
- Independent on/off light switch
- 2" foamed-in-place "zero ODP" urethane insulation

DOORS

- Replaceable magnetic door gasket
- Foamed-in-place rear doors
- Self-closing

REFRIGERATION

 Self-contained, semi-hermetic condensing unit

- Rear air intake and discharge
- Automatic defrost
- Refrigerant: R-404A
- No minimum clearance required on cabinet sides but front, back and top must be left open for customer and operator access
- Temperature range: 0° to -20°F (-18° to -29°C)
- R-factor (insulation efficiency rating): 17.24

WARRANTY

• Standard limited three year extended compressor and two year limited parts and labor

	_	_				
•1	D.		70	•	7	Q


- □ Custom colors
- □ Casters



TECHNICAL SPECIFICATIONS

	DIM	ENSI (in.)	ONS	DIMENSIONS (mm)						STANDARD SHELF	DISPLAY		SHIP	SHIP	
MODEL	L	D	н	L	D	Н	VOLTS	AMPS	UNIT H.P.	NO. OF SHELVES	SIZE (in inches)	AREA SQ. FT.	CAP. CU. FT.	CU. FT.	WT. (LB/KG)
FIP-50	60	31	50	1524	787	1270	115	13.4	3/4	4	*	18.0	18.1	87.0	640/291

^{*}Upper right hand and upper left hand shelves measure 12" x 27". Lower right hand and lower left hand shelves measure 15" x 27".

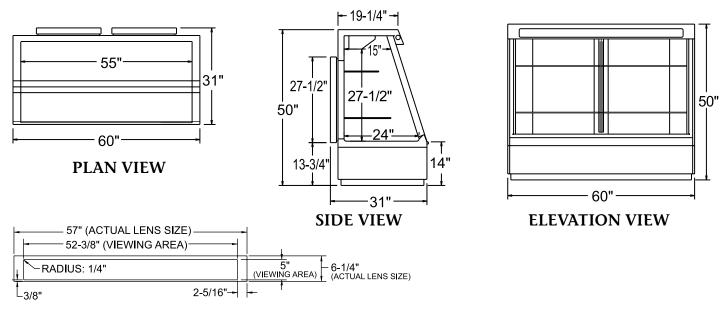

REMOVABLE LENS DIMENSIONS

LISTINGS



HOOKUP

Via plug in, 9 foot long, flexible 3 wire 14/3 cord with molded plug. Fifteen amp service is required.



BID SPECIFICATIONS

Item no. FIP-50 Provide Low Temp Ice Cream and Novelty Display Merchandiser(s), Master-Bilt model no. FIP-50. Merchandiser to be provided with an elec-

tronically controlled monitoring system. Merchandiser to feature textured finish on interior and exterior, 60" x 19" top stainless steel serving deck, extra large non-fogging front display window, four panes of tem-

pered front glass, backlit merchandising sign

length fluorescent lamp. Merchandiser to also have automatic condensate evaporator and independent on/off light switch. Cabinet to be foamed-in-place with "zero ODP" urethane insulation and to have a sparkling white polyester enamel

interior and exterior. The doors are to be

in stainless steel frame, anodized aluminum

trim with black vinyl inlay, protective front

bumper, four adjustable heavy-duty, white

epoxy-coated welded wire shelves, and a full

self-closing and have magnetic door gaskets. Rear doors are to be foamed-in-place.

The refrigeration system is to have a selfcontained, semi-hermetic condensing unit using R-404A refrigerant. Refrigeration system will also contain a low maintenance bare tube condenser coil. The temperature range is to be 0° to -20°F (-18° to -29°C).

Merchandiser to have standard limited three year extended compressor warranty and two year limited parts and labor warranty. Merchandiser to be UL, C-UL & NSF listed.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.



908 Highway 15 North • New Albany, MS 38652

PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com

